



T-1 Straight Tee

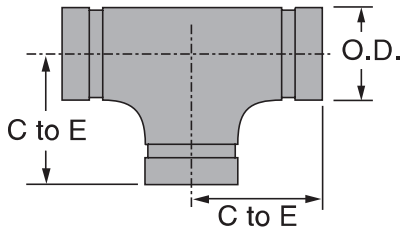

APPROVED

For Listing/Approval Details and Limitations visit our Web Site www.anvilintl.com or contact an Anvil®/AnvilStar™ Sales Representative.

T-1 STRAIGHT TEE			
Nominal Size	O.D.	C to E	Approx Wt. Ea.
<i>ln./DN(mm)</i>	<i>ln./mm</i>	<i>ln./mm</i>	<i>Lbs./kg</i>
1¼ 32	1.660 42.2	2¾ 69	1.4 0.7
1½ 40	1.900 48.3	2¾ 69	1.5 0.7
2 50	2.375 60.3	3¼ 83	2.4 1.1
2½ 65	2.875 73.0	3¾ 95	3.6 1.6
3 80	3.500 88.9	4¼ 108	6.3 2.9
4 100	4.500 114.3	5 127	9.6 4.4
5 125	5.563 141.3	5½ 140	17.8 8.1
6 150	6.625 168.3	6½ 165	25.3 11.5
8 200	8.625 219.1	7¾ 197	42.1 19.1
10 250	10.750 273.1	9 229	69.0 31.3
12 300	12.750 323.9	10 254	91.0 41.3

MATERIAL SPECIFICATIONS:

CAST FITTINGS:

Ductile iron conforming to ASTM A-536 Grade 65-45-12

COATINGS:

Rust inhibiting paint: Color: ORANGE (standard) or Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)
Other available options: Example: RAL3000 or RAL9000 Series