


Dry Riser System (Inlets)

An inlet breeching at ground level provides the connection to the water supply. The system is normally dry and is charged by the fire brigade in an emergency. Breeching inlets have either 2 or 4 inlet connections complete with 2.5" male instantaneous inlets to BS336 fitted with non-return valves, 1" drain valve and caps and chains. A 100mm (4") rising main uses a 2-way inlet breeching in a vertical or horizontal position. A 150mm (6") rising main uses a 4-Way inlet breeching. Inlet Breechings comply with the requirements of BS 5041 Part 3.

The Breechings are normally housed in inlet cabinets, normally recessed into the external wall of the building in a vertical or horizontal position, 4-way breechings in a square inlet breeching cabinet, manufactured in accordance with BS 5041 Part 5. Cabinets for foam inlets are available on request.

4-Way Breeching Inlet Cabinet

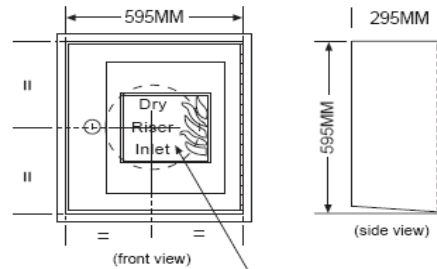

31mm Diameter Hole
For Valve Entry

Shield 1804	Red Ral 3002 As Standard
Shield 2030	Stainless Steel Satin Polished (See Cabinet Options)
Backbox Dimensions 595mm High x 595mm Wide x 295mm Deep	

(Minimum aperture 605mm wide 605mm high)

Cabinet Specifications:


Cabinet & Door: 16swg Zintec Steel.
 Colour: As Standard Red Ral 3002.
 Architrave: 30mm Wide All Round.
 Glass: 6mm Georgian Wired, PRV Lettering.
 Lock: Yale Slam Lock Keyed Alike.
 Hinge: Stainless Steel Piano Hinge.
 Conforms: To BS 5041 Part 5

The right is reserved to modify or withdraw any product without notice

4-Way Breeching Inlet Valve



Shield 012	Outlet Flanged 150mm BS 4504 PN16
------------	--------------------------------------

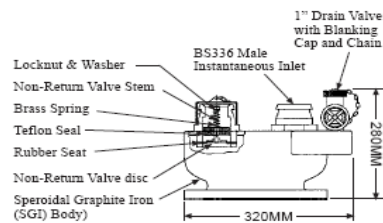

The right is reserved to modify or withdraw any product without notice



Fire Protection &
Flow Control Products

Tel: 01724 854199 Fax: 01724 854213

Email: sales@fireprotectioncentre.com
www.fpccdatacentre.co.uk

Freefax: 0800 65 200 31