


Nickel Plated Body, Screwed BSPP Female, Full Bore, Yellow PVC Coated Steel Lever

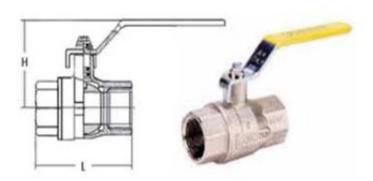

Pressure/Temperature Ratings					
Max Pressure	1/4" - 1/2" PN64				
	3/4" - 21/2" PN40				
	3" PN32				
	4" PN25				
Temperature Gas	-20°C to 70°C				
Temperature Fluid	-20°C to 150°C				

Material List	
Body	Brass Nickel Plated
Ball	Brass
Seats	PTFE
Stem	Brass
Stem Seal	Viton/NBR
Handle	PVC Coated Steel

Dimens	Dimensions							
DN	Size	L	Н	Kg				
8	1/4"	48	48	0.13				
10	1/8"	48	48	0.15				
15	1/2"	59	55	0.25				
20	3/4"	69	66	0.4				
25	1"	83	70	0.6				
32	11/4*	94	83	0.95				
40	11/2"	102	93	1.24				
50	2*	124	102	1.88				
65	21/2"	148	143	3.35				
80	3"	171	153	5.4				
100	4"	206	187	8.84				







A GREAT DEAL TO OFFER

Nickel Plated Body, Screwed BSPP Female, Reduced Bore, Lever Operated







L-Port Configuration

T-Port Configuration

Pressure/Temperature Ratings					
Pressure	1/4" - 3/8" 55 Bar				
	1/2" - 3/4" 50 Bar				
	1" 45 Bar				
	11/4" - 2" 35 Bar				
	21/2" 40 Bar				
	3" 16 Bar				
Temperature	1/4" - 2" -10°C to 120°C				
Temperature	21/2" - 3" -15°C to 100°C				

Material List 1/4" - 2"	
Body	Brass Nickel Plated
Ball	Brass Chrome Plated
Seats	PTFE
Stem	Brass
Stem O-Ring 1/4" - 2"	NBR
Stem O-Ring 21/2" - 3"	Viton
Handle	Aluminium

Dimensions 1/4" - 2"								
Size	В	D	E	F	G	н	CH	DN
1/4"	65	38.5	77	125	75	22	22	10
1/8"	65	38.5	77	125	75	22	22	12
1/2"	65	38.5	77	125	75	22	27	14
3/4"	83	46	92	145	91	25	34	18
1"	96	52	104	170	105	30	41	23
11/4"	102	59	118	170	115	34	50	29
11/2"	109	69	138	170	128	40	57	36
2*	139	81	162	260	165	48	70	45

Dimensions 21/2"							
DN	L	L2	0	1	н	М	
21/2"	194	97	50	35	124	240	

Dimensions 3"									
DN	Size	00	Α	B min	B max	ØC	E	F	L
80	3"	44	235	129	141	95	47	148	202

