


Foot Valve and Strainer Data Sheet

MP FIG.180

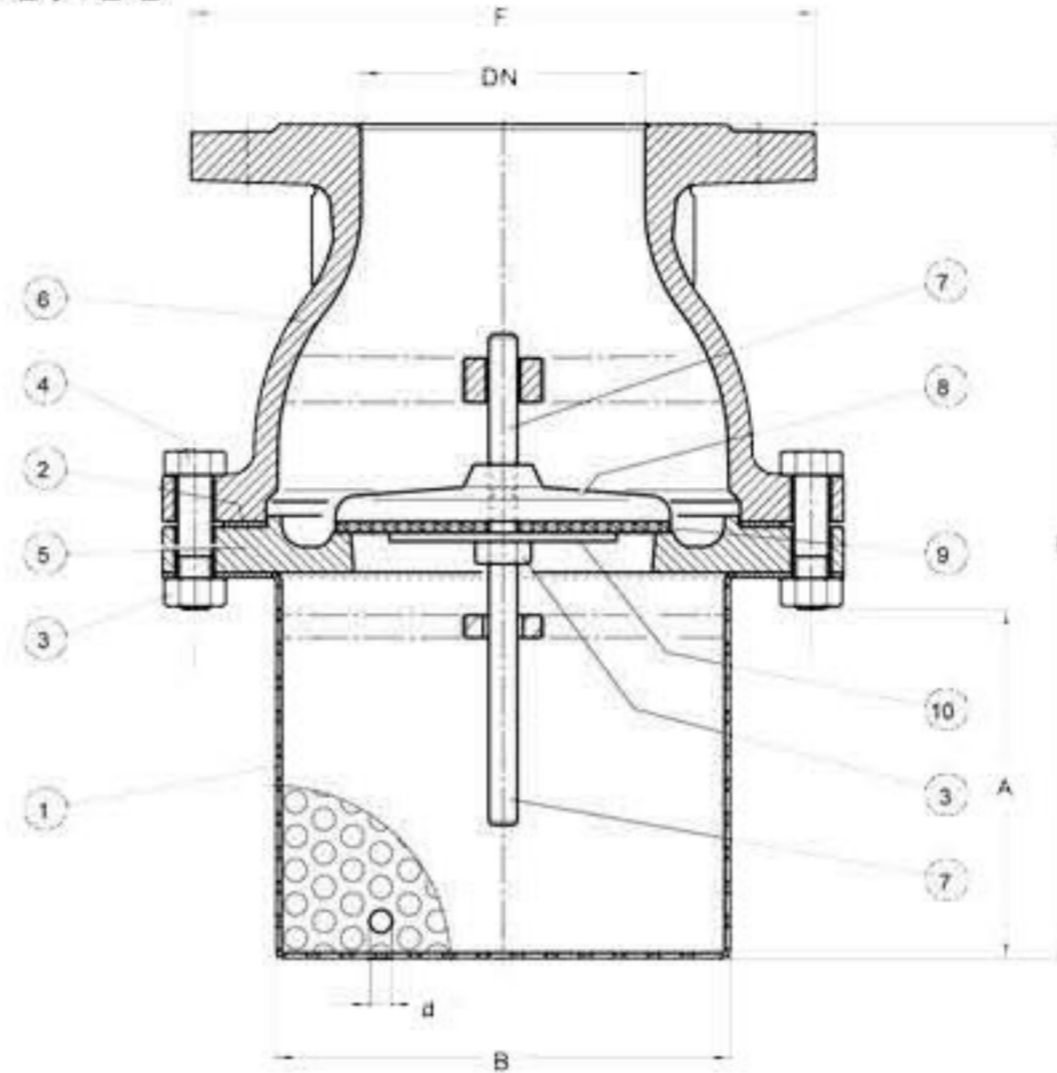

Max temperature with standard gaskets +80°C
On request gaskets suitable for temperature >80°C

DN	40	50	65	80	100	125	150	200	250	300
F	150	165	185	200	220	250	285	340	405	460
H	170	185	220	240	265	320	370	460	560	670
A	60	60	75	75	95	115	135	175	220	263
B	93	93	116	131	158	193	226	295	395	470
Kg	6	9	11	13	19	26	36	58	104	153

POS.	PARTS	MATERIALS
1	SIEVE	ZINC-PLATED CARBON STEEL
2	GASKET	SBR RUBBER
3	NUT	CARBON STEEL
4	SCREW	8.8 CARBON STEEL
5	SEAT DISC	GG25 CAST IRON
6	BODY	GG25 CAST IRON
7	SLIDE BAR	DRAWN BRASS
8	DISC	GG25 CAST IRON
9	GASKET	FIBER REINFORCED NBR RUBBER
10	WASHER	CARBON STEEL DN40-DN150
10	WASHER	GG25 CAST IRON DN200-DN300

Hydraulic test ISO 5208 RATE A	
Maximum rated pressure in relation to temperature and material	
Pressure	Temperature
16 bar	-10°C/+80°C
16 bar	+80°C/+120°C
13 bar	+120°C/+150°C