

Corrosion Resistant Ductile Iron Gate Valves



High Quality WRC approved Resilient Seated valves at affordable prices. Manufactured to BS5163; our range of Ductile Iron Gate Valves offer quality features for reliable operation and ease of maintenance, providing an ideal solution for pump house and fire ring main applications.

FEATURES

- Resilient seating gives bubble tight shutoff
- Stem seal replacement without the need for line shutdown
- Tough Epoxy coating inside and out for maximum corrosion resistance
- WRC approved up to 300mm
- Size range from 50mm to 400mm
- Pressure rated to 16 bar
- Flanges drilled to BS4504 PN 16/11
- Pre-engineered flange sets available for all sizes

These quality products are available now for next day delivery

Fire Protection Centre leads the way in delivering great customer service and our independent purchasing strategy ensures our prices are as good as our products.

Call our sales team now for pricing and experience the difference when you choose a truly independent distributor.



**FIRE
PROTECTION
CENTRE**



Fire Protection Centre Limited.

Atkinsons Way, Foxhills Industrial Estate, Scunthorpe, N.Lincolnshire DN15 8QJ


t: 01724 854199 FREEFAX: 0800 65 200 31 e: sales@fireprotectioncentre.com www.fireprotectioncentre.com

Ductile Iron Resilient Seated Gate Valve To BS5163

- Manufactured to BS5163:1986 type B
- Face to face dimension to BS5163:1986
- Flanges and drilling to BS4504:PN 16/11
- Stem seals replaceable under pressure
- Use: for water, sewage and neutral liquids to Max.70°C
- Test: Hydraulic Test to BS5163
- Epoxy resin coated: internally and externally
- WRAS Approved up to 300mm

COMPONENTS

No.	Name	Material
1	Stem	Stainless Steel BS970 431529
2	Gland Flange Bolt	Stainless Steel
3	Wiper Ring	NBR
4	Gland Flange	Ductile Iron BS2789 Gr. 500/7
5	Stem Seal Box	Brass, CZ122 To BS2872
6	O-Ring	NBR
7	Bonnet	Ductile Iron BS2789 Gr. 500/7
8	Thrust Collar	Brass, CZ122 To BS2872
9	Bonnet Bolt	Stainless Steel
10	Bonnet Gasket	EPDM Rubber
11	Wedge Nut	Brass, CZ122 To BS2872
12	Wedge	D/I Core Fully Vulcanized With NBR or EPDM Rubber
13	Body	Ductile Iron BS2789 Gr. 500/7

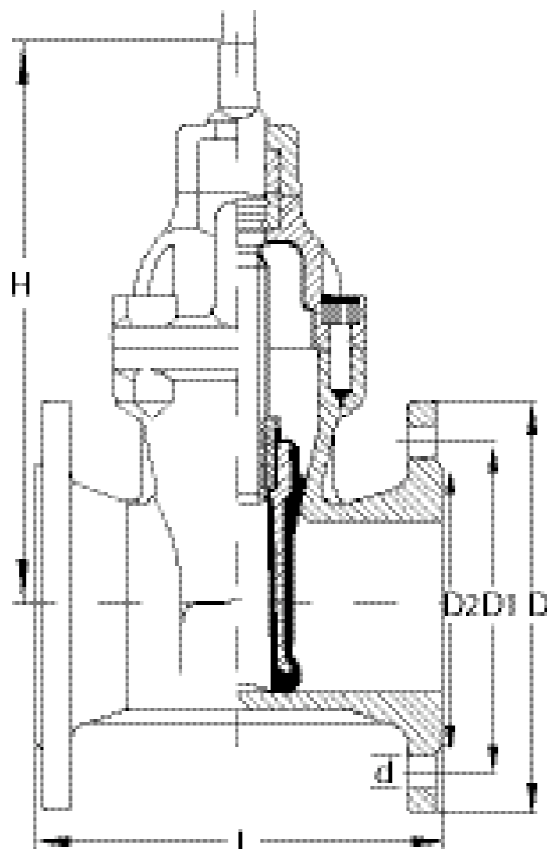

DIMENSIONS (mm)

DN	Part No.	L	H	D2	D	D1	d	Holes
50	GAT057050ACE	178	334	99	165	125	19	4
65	GAT057065ACE	190	341	118	185	145	19	4
80	GAT057080ACE	203	371	132	200	160	19	8
100	GAT057100ACE	229	398	156	220	180	19	8
150	GAT057150ACE	267	490	211	285	240	23	8
200	GAT057200ACE	292	574	266	340	295	23	12
250	GAT057250ACE	330	651	319	405	355	28	12
300	GAT057300ACE	356	741	370	460	410	28	12
350*	GAT057350ACE	381	830	429	520	470	28	16
400*	GAT057400ACE	406	896	480	580	525	31	16

*Not WRAS Approved

Fire Protection Centre Limited.

Atkinsons Way, Foxhills Industrial Estate, Scunthorpe, N.Lincolnshire DN15 8QJ

t: 01724 854199 FREEFAX: 0800 65 200 31 e: sales@fireprotectioncentre.com www.fireprotectioncentre.com