

Reliable®

NEW

PRODUCT UPDATE

RELIABLEFLEX

The Simple and Efficient Flexible Sprinkler Connection

New from Reliable is Reliableflex, the flexible sprinkler connection system for wet pipe sprinkler systems which significantly reduces installation time and yet is incredibly efficient. This unique system easily positions the sprinkler in the centre of the ceiling tile at the correct height and can be installed in 10 to 15 minutes.

Reliableflex is a complete system, including a corrugated stainless steel flexible hose with nipple, reducer, bar and brackets which are fitted to the ceiling tile support rails to locate and secure the sprinkler in the correct position. In addition to faster installation time the risk of debris from the cutting and threading process associated with the traditional armover method is eliminated, so you can continue other activities more efficiently.

The Benefits:

- Save time, save labour, save money
- No cutting, no welding, no threading, no mess
- No oil, no grease
- No measuring. Ideal for retrofit applications
- Easy to move for layout changes

Reliableflex is LPCB Approved




Certificate Nos. 140B



Reliableflex installed



Elbow connection

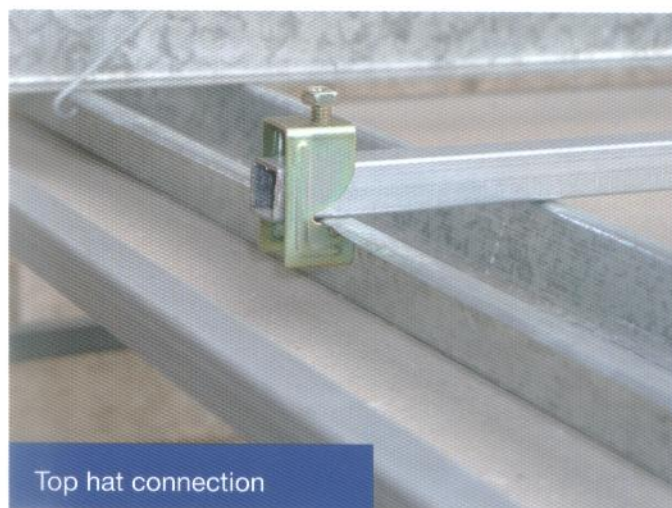

Top hat connection

Technical Specification overleaf >

Pressure Rating

Max. Service Pressure: LPCB 16 Bar
 Inlet R1 or R1.1/4 or 1"NPT
 Outlet A = Rc1/2 or 1/2"NPT
 B = Rc3/4 or 3/4"NPT
 C = R1 (External Thread)


Standard Lengths

Equivalent Pipe Length

Product	Length	Schedule 40	BS EN 10255
Reliableflex	0.78m	5.5m	6.0m
Reliableflex	1.00m	7.8m	8.5m
Reliableflex	1.22m	10.1m	11.0m
Reliableflex	1.54m	13.1m	14.2m

Material Specification

Ref No.	Description	MODEL SP Qty	Material
1	Flexible	1	AISI 304
2	Nut	2	SS400 Zinc Plated
3	Isolation Ring	2	Nylon 66
4	Packing (Seal)	2	NBR
5	Reducer	1	Carbon Steel Zinc Plated
6	Nipple	1	Carbon Steel Zinc Plated
7	Bracket A	1	Mild Steel Zinc Plated
8	Bracket B	2	Mild Steel Zinc Plated
9	Square Bar	1	Mild Steel Zinc Plated

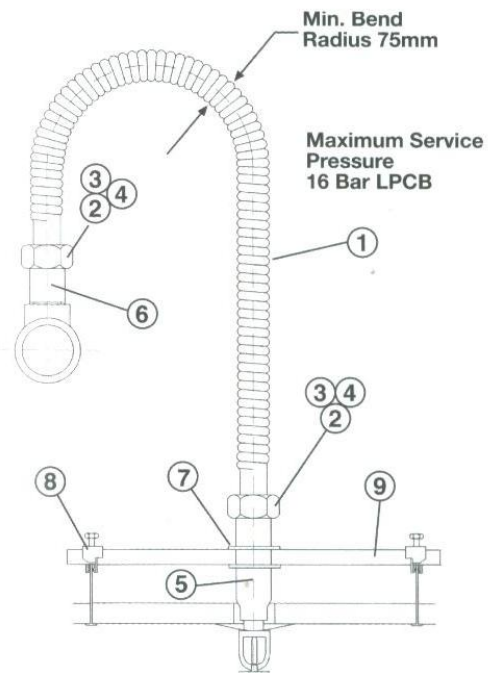

Minimum Radius Indicator

