


Fig. No.: REL-BFG-175

BUTTERFLY VALVE-GROOVED TYPE-175psi

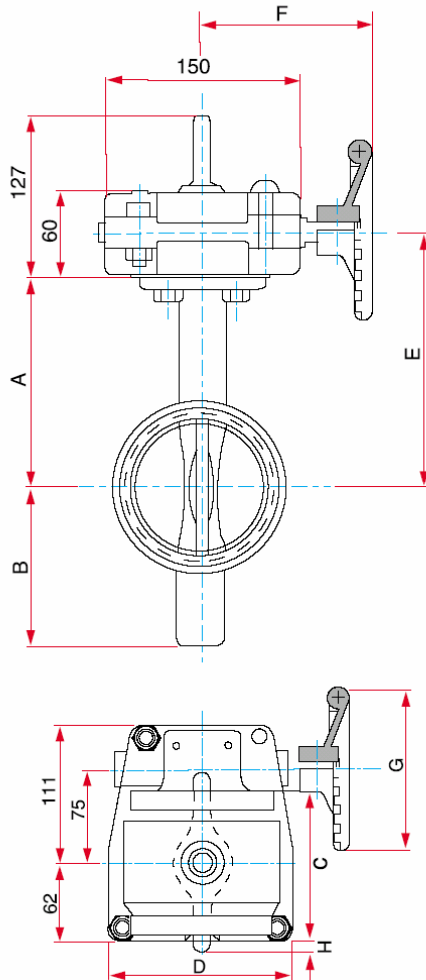

Materials List

COMPONENT	MATERIAL
Body	Ductile ASTM A536 Nylon Coated
Disc	Ductile Iron ASTM A536 EPDM Encapsulated
Stems	Stainless Steel AISI 420
Worm Gear Shaft	Stainless Steel AISI 420
Gear Housing	Ductile Iron ASTM A 536 65-45-12
Handwheel	Ductile Iron ASTM A 536 65-45-12
Flag Indicator	Ductile Iron ASTM A 536 65-45-12
Segment Gear	Bronze ASTM B-148 or ASTM B584
Gaskets and "O" rings	EPDM Grade"E"

General Dimensions

Size	A	B	C	D	E	F	G	H
inch mm	inch mm	inch mm	inch mm	inch mm	inch mm	inch mm	inch mm	inch mm
2½" 65	4.10 105	3.30 85	3.70 94.6	2.90 73.0	5.30 135	5.30 135	4.90 125	
3" 80	4.40 112	3.60 92	3.80 96.4	3.50 88.9	5.60 142	5.30 135	4.90 125	
4" 100	5.70 145	4.30 108	4.50 115.4	4.60 116.2	6.90 175	5.30 135	4.90 125	
6" 150	7.10 180	5.70 145	2.20 133.4	6.60 168.3	8.30 210	7.60 193	8.90 225	0.40 11.2
8" 200	8.00 204	6.70 170	5.80 147.7	8.60 291.1	9.10 232	7.60 193	8.90 225	0.90 24.0

Notes:

Design and materials are subject to change without notice.